


Revision Notes:	
1. FRAME UPDATED. INTERCOM CABLE REVISED.	
Checked By: JIN	Approved By: DK
	Date Released: 13/10/11

ITEM	STOCK CODE	QTY	DESCRIPTION
1	(#0990)	1	BC-VI-2 MASTER
2	(#0991)	1	BC-VI-2 SLAVE
3	(# TBD)	1	FITTING INSTRUCTIONS (NOT SHOWN)

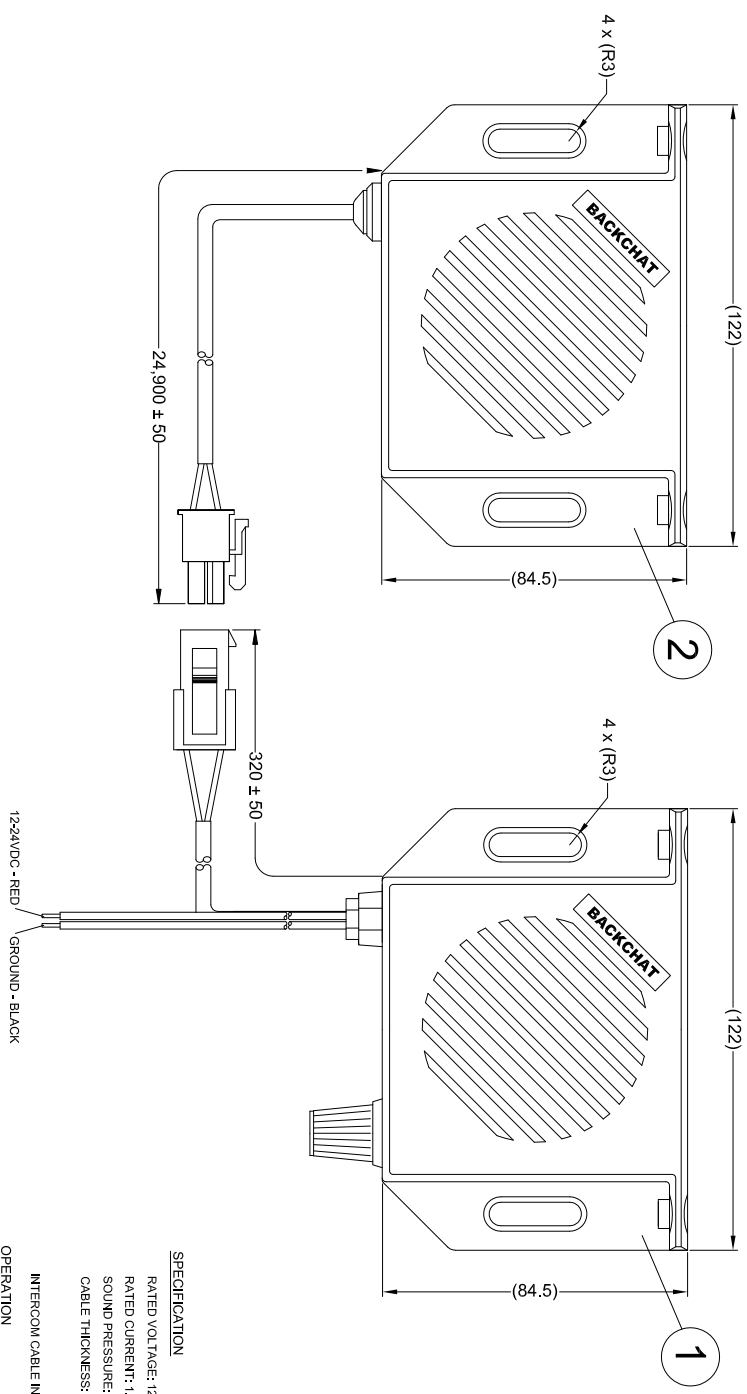

SPECIFICATION

- RATED VOLTAGE: 12 AND 24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 10 THRU 30 VOLTS)
- RATED CURRENT: 1.0 AMPERES OR LESS
- SOUND PRESSURE: MAX 90dB DECIBELS AT TEST VOLTAGE OF 14 AND 28 VOLTS
- CABLE THICKNESS: POWER CABLES 240.2MM
- INTERCOM CABLE 4 INSULATED CORE 70.22MM CABLE IN PVC SHEATHING
- INTERCOM CABLE INSULATION MUST BE FULLY POTTED AT POINT OF CONNECTION TO PCB.
- OPERATION**
- MASTER & SLAVE ARE BOTH IDLE UNLESS THE PUSH TO TALK BUTTON IS PRESSED ON EITHER UNIT
- UPON WHICH THE MASTER OR SLAVE WILL TRANSMIT TO THE OTHER UNIT:
- IF THE SLAVE & MASTER TRY TO TRANSMIT SIMULTANEOUSLY
- NEITHER UNIT WILL BE ABLE TO TRANSMIT OR RECEIVE.

- NOTES:**
1. DIMENSIONS IN MM.
 2. MATERIAL: ABS PLASTIC - ULTRA VIOLET STABILIZED.
 3. FINISH: BLACK
 4. FOR COMPONENT DETAIL REFER TO COMPONENT DRAWINGS.
 5. 4 X M6 X 25 BOLTS, 4 X M6 FLAT WASHER & 4 X M6 NUTS ARE SUPPLIED IN A PRESS SEAL BAG IN THE BOX.
 6. INTERCOM CABLE LENGTH IS MEASURED FROM CABLE ENTRY POINT ON HOUSING.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPLOITED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval AHEADLE Angle of Projection Third Angle	Approved by DKERAI	Checked by JNEWMAN	Drawn by MBUTLER
	Units mm	Scale N/A	Released 13/10/11
Status RELEASED	BC-VI-2 SYSTEM		
Stock Code #0875	BE-001756-00-11		