


Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -


VIEW A



2 PIN MALE MATING FACE




PIN #	DESCRIPTION
1	GND
2	SENSOR SIGNAL

VIEW B




5 PIN MALE MATING FACE

PIN #	DESCRIPTION
1	DATA
2	GROUND
3	BUZZER POWER
4	BUZZER SIGNAL
5	12 - 24V DC

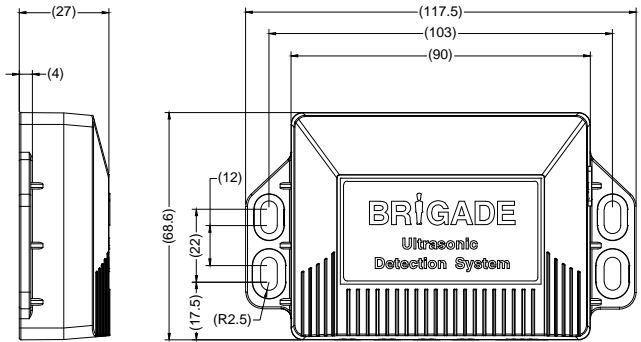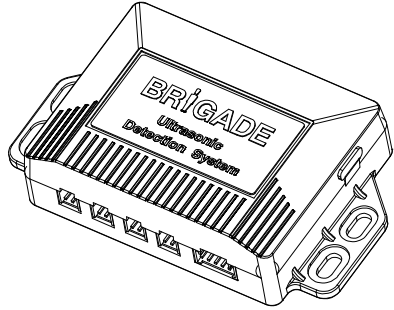



DIP SWITCH LOCATION COVERED BY RUBBER GROMMET



PRODUCT LABEL LOCATION



SERIAL NO. LABEL LOCATION

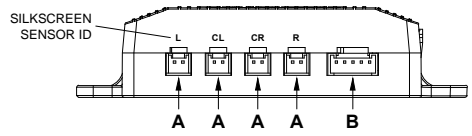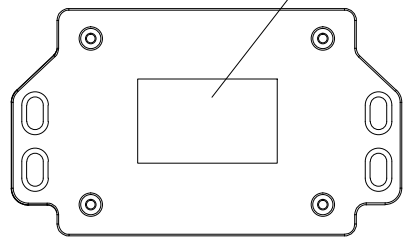

DIP SWITCH CONFIGURATION

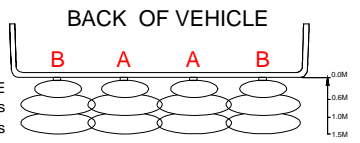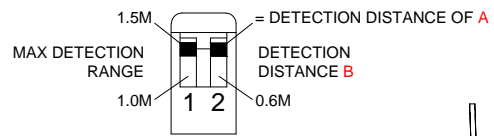

8 fps & **CONSTANT TONE**
4 fps & 4 bps
1 fps & 1 bps

- NOTES:**
- FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-001560-XX-11.
 - FOR PRODUCT SERIAL NUMBER LABEL REFER TO LATEST REVISION OF DRAWING BE-001564-XX-11.
 - ALL AUDIBLE WARNINGS ARE MEASURED IN BEEPS PER SECOND (bps).
 - ALL VISUAL WARNINGS ARE RED AND ARE MEASURED IN FLASHES PER SECOND (fps).
 - ON START-UP THE SYSTEM WILL BEEP ONCE. SUBSEQUENT BEEPS INDICATE FAULTY SENSORS - ONCE FOR ONE FAULTY SENSOR, TWICE FOR TWO ETC.
 - DIP SWITCH 1 SWITCHES DETECTION BETWEEN 1.0 & 1.5m. DEFAULT POSITION IS 1.5m.
 - DIP SWITCH 2 SWITCHES OUTER SENSORS BETWEEN 0.6 & DETECTION DISTANCE OF 'A'.
 - SOFTWARE VERSION: DIC-10015-60-1.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval ALLEN YAO 31/07/15		Approved by B.JOHN		Checked by R.BATES		Drawn by P.MISSEN	
Angle of Projection Third Angle		Units mm	Scale N/A	Released 07/08/15	Assembly Ref -		
Status RELEASED		BS-4000-ECU					
Part No 4477		BE-002575-00-14					