


PART NO.	STOCK CODE	LENGTH (A)	TOLERANCE
UDS-2.5SC	3719	2.5M	± 50MM
UDS-4.5SC	3720	4.5M	± 50MM
UDS-7.0SC	5623	7.0M	± 100MM
UDS-8.0SC	5677	8.0M	± 100MM

R2

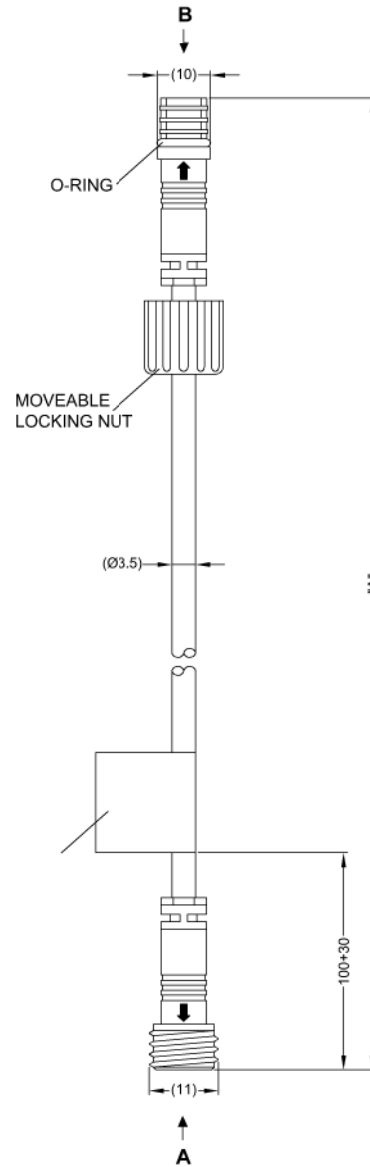

Revision Notes.			
R1 - 7M SENSOR CABLE ADDED TO PARTS LIST, DRAWING FRAME AND NOTES UPDATED AS PER P1255			
APA: A.YAO	Drawn:W.SINDEN	Checked:W.BEAZLEY	Approved:B.CHILDS Date: 29/09/18
R2 - 8M SENSOR CABLE ADDED TO PARTS LIST AND NOTES UPDATED REF. P1266			
APA: A.YAO 07/12/18	Drawn:W.SINDEN	Checked:J.TYRRELL	Approved:B.CHILDS Date: 03/12/18

VIEW B



2 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	SENSOR SIGNAL

VIEW A



2 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	SENSOR SIGNAL

NOTES:

- INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
- ALL INTERNAL CABLES SHOULD BE A MINIMUM OF 24 AWG.
- FOR PRODUCT LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®

Assembly PI Approval LEE QG - 19.07.2011	Approved by D.KERAL	Checked by M.POTTER	Drawn by M.BUTLER
Angle of Projection 	Units mm	Scale N/A	Released 07/12/18
Status RELEASED	Assembly Ref - UDS-X.XSC		
Part No VARIOUS	BE-001542-02-11		