



PART NO.	STOCK CODE	LENGTH (A)	TOLERANCE
UDS-2.5BC	3717	2500	± 50
UDS-10BC	3716	10000	± 100
UDS-15BC	3746	15000	± 100
UDS-30BC	5745	30000	± 200

R2

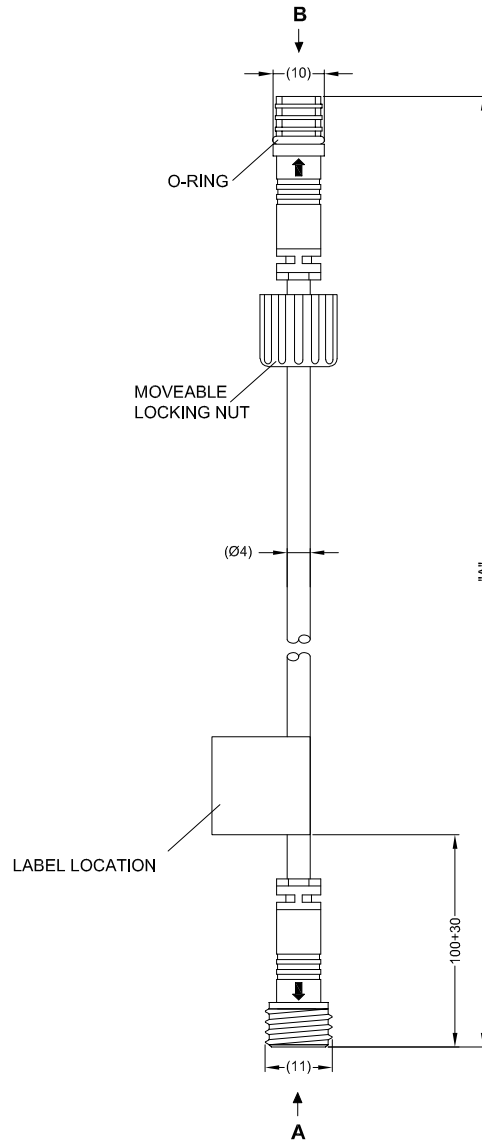

Revision Notes.				
R1 - ADDED UDS-15BC INFORMATION				
APA: -	Drawn:M.BUTLER	Checked:B.CHILDS	Approved:S.MATTHEWS	Date: 20.02.12
R2 - ADDED UDS-30BC INFORMATION AS PER P1275				
APA: A.YAO	Drawn:W.SINDEN	Checked:J.TYRRELL	Approved:B.CHILDS	Date: 26/03/19


VIEW B



3 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	BUZZER POWER
3	WHITE	BUZZER SIGNAL

VIEW A



3 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	BUZZER POWER
3	WHITE	BUZZER SIGNAL

- NOTES:
1. DIMENSIONS IN MM.
 2. INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
 3. ALL INTERNAL CABLES SHOULD BE A MINIMUM OF 24 AWG.
 4. FOR PRODUCT LABEL AND PACKAGING DETAILS REFER TO MASTER BOM.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval LEE QG - 19.07.2011	Approved by D.KERAI	Checked by M.POTTER	Drawn by M.BUTLER
Angle of Projection 	Units mm	Scale N/A	Released 00/00/00
Status RELEASED	Assembly Ref AEC-10015-20		
Part No VARIOUS	BE-001543-02-11		