


SETTING INFORMATION

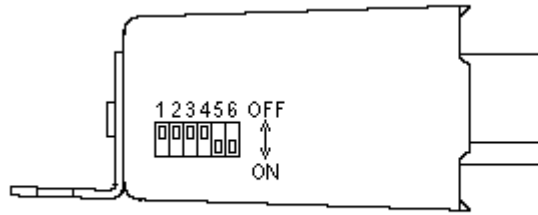

Example shows Speed Switch set to Switch Off at 9.26km/h (5.8mph)

Switch Position On	Speed km/h	Speed mph	Switch Position On	Speed km/h	Speed mph	Switch Position On	Speed km/h	Speed mph
None	2.50	1.6	2,4,5	42.48	26.4	1,3,4	74.74	46.4
6	4.90	3.0	2,4,5,6	44.40	27.6	1,3,4,6	76.53	47.6
5	7.00	4.4	2,3	43.76	27.2	1,3,4,5	78.23	48.6
5,6	9.26	5.8	2,3,6	45.72	28.4	1,3,4,5,6	79.90	49.7
4	11.53	7.2	2,3,5	47.52	29.5	1,2	79.36	49.3
4,6	13.72	8.5	2,3,5,6	49.42	30.7	1,2,6	81.12	50.4
4,5	15.69	9.8	2,3,4	51.43	32.0	1,2,5	82.84	51.5
4,5,6	17.84	11.1	2,3,4,6	53.33	33.1	1,2,5,6	84.51	52.5
3	17.11	10.6	2,3,4,5	55.10	34.2	1,2,4	86.38	53.7
3,6	19.24	12.0	2,3,4,5,6	56.94	35.4	1,2,4,6	88.11	54.8
3,5	21.17	13.2	1	55.29	34.4	1,2,4,5	89.78	55.8
3,5,6	23.27	14.5	1,6	57.18	35.5	1,2,4,5,6	91.36	56.8
3,4	25.42	15.8	1,5	58.95	36.6	1,2,3	90.89	56.5
3,4,6	27.48	17.1	1,5,6	60.78	37.8	1,2,3,6	92.57	57.5
3,4,5	29.37	18.3	1,4	62.73	39.0	1,2,3,5	94.25	58.6
3,4,5,6	31.39	19.5	1,4,6	64.60	40.2	1,2,3,5,6	95.85	59.6
2	30.73	19.1	1,4,5	66.33	41.2	1,2,3,4	97.66	60.7
2,6	32.75	20.4	1,4,5,6	68.08	42.3	1,2,3,4,6	99.37	61.8
2,5	29.90	18.6	1,3	67.53	42.0	1,2,3,4,5	100.97	62.8
2,5,6	36.61	22.8	1,3,6	69.34	43.1	1,2,3,4,5,6	102.50	63.7
2,4	38.68	24.0	1,3,5	71.08	44.2			
2,4,6	40.65	25.3	1,3,5,6	72.82	45.3			

WIRING INFORMATION

