

CHANGES FROM BASE PRODUCT BS-4000W-ECU (3744) TO BS-4000W(TA)-ECU (5620A)

CHANGE: 1. REDUCE NUMBER OF BEEPS BY HALF OF THAT OF THE BASE PRODUCT.  
2. BS-4000W-ECU PD-LBL REPLACED WITH BS-4000W(TA) PD-LBL.


OPERATION: REDUCE NUMBER OF BEEPS BY HALF OF THAT OF THE BASE PRODUCT.  
ADDED MUTE FUNCTION.  
NO AUDIBLE WARNING GREATER THAN 1.5 METERS.

Revision Notes.

R1 -

APA: - Drawn:- Checked:- Approved:- Date: -


VIEW A



2 PIN FEMALE MATING FACE



PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	SENSOR SIGNAL

VIEW B






3 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	BLACK	GND
2	RED	BUZZER POWER
3	WHITE	BUZZER SIGNAL

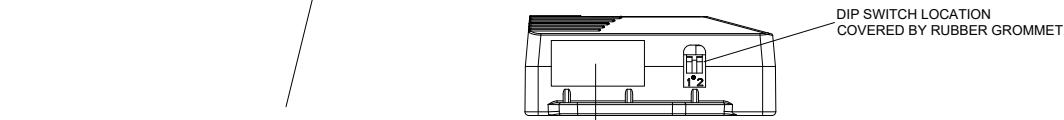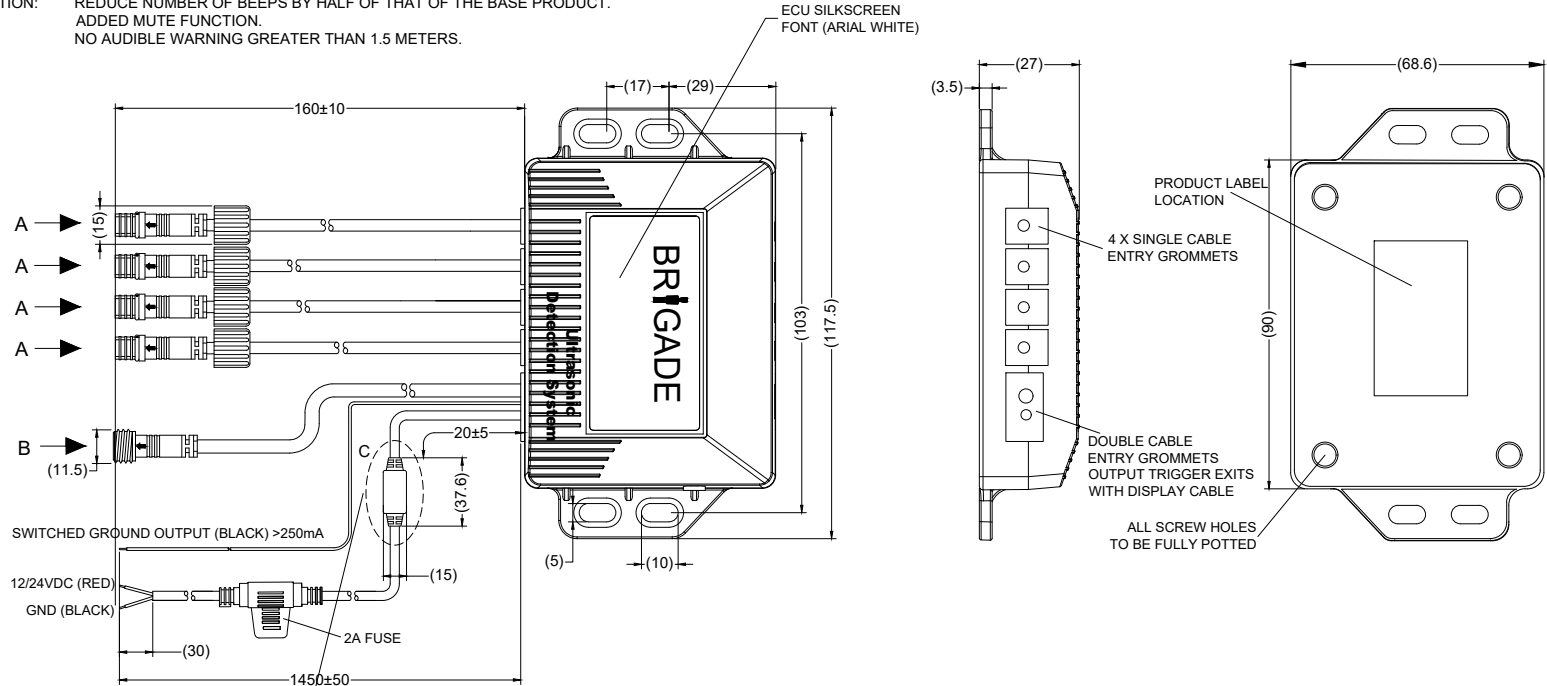

DIP SWITCH CONFIGURATION

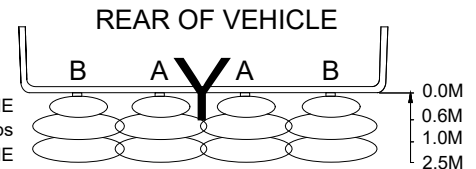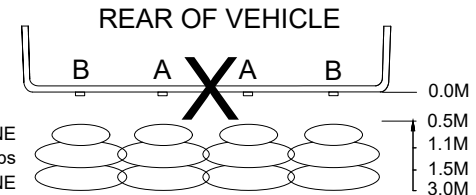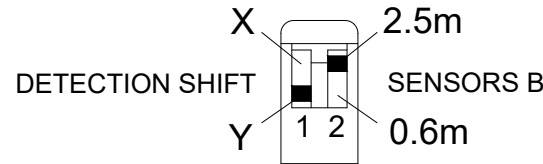

- NOTES:
1. WHEN THE SYSTEM IS POWERED BUT NOT DETECTING THE LED WILL REMAIN GREEN.(NO START UP BEEP)
  2. ALL AUDIBLE WARNINGS ARE MEASURED IN BEEPS PER SECOND (bps).
  3. ALL VISUAL WARNINGS ARE RED AND ARE MEASURED IN FLASHES PER SECOND (fps).
  4. THE SELF DIAGNOSTIC FUNCTION (ON START-UP) WILL BEEP ONCE FOR ONE FAULTY SENSOR, TWICE FOR TWO FAULTY SENSORS ETC...
  5. DIP SWITCH 1 SWITCHES DETECTION BETWEEN (X & Y), DEFAULT POSITION IS Y. (HOWEVER THE UDS-DISPLAYS RANGE WILL ALWAYS SHOW 0.0 - 2.5m.)
  6. DIP SWITCH 2 SWITCHES OUTER SENSORS BETWEEN 0.6M & 2.5M, DEFAULT POSITION IS 2.5M.
  7. THE ECU IS FULLY POTTED.
  8. GROUND OUTPUT ON BLACK WIRE OPERATES DURING DETECTION.(MAXIMUM CURRENT 250mA)
  9. PCB REVISION LEVEL: PCB-10015-00.
  10. SOFTWARE VERSION: DIC-10015-12
  11. FOR PACKAGING AND LABELLING DETAILS REFER TO MASTER BOM
  12. ANY CUSTOMER MODIFICATION OF THIS PRODUCT CAUSING SUBSEQUENT FAILURE IS NOT A LIABILITY OF BRIGADE ELECTRONICS PLC.
  13. MUTE FUNCTION ADDED, WHEN THE SYSTEM DETECTS AN OBJECT AND THERE IS NO CHANGE IN DETECTION DISTANCE AFTER 4 SECONDS, THE VISUAL ALERT WILL REMAIN RED ALTHOUGH THE AUDIBLE ALERT WILL BE SILENCED.

PROPRIETARY NOTICE  
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

**BRIGADE**  
www.brigade-electronics.com

Assembly Pl Approval A. YAO	Approved by B. CHILDS	Checked by W. SINDEN	Drawn by J. TYRRELL
Angle of Projection 	Units mm	Scale N/A	Released 07/03/19
Status RELEASED	Part No 5620A	Assembly Ref -	BS-4000W(TA)-ECU BE-003990-00-19