

AC-24-12(007) (4762)

Iveconnect Adapter Cable



FITTING NOTES

- 1. This adapter cable is for vehicles with suitable Iveconnect controllers only. Refer to manufacturers guidelines for other models.
- 2. CVBS1 video input used for reverse camera. Configure menu option "Camera Activated by Reverse" as required.
- 3. CVBS2 & CVBS3 video inputs can be not triggered. Views only available through menu selection.
- 4. Terminals to be inserted in appropriate plug housing position. Terminals must 'click' in place.
- 5. Green wire (GROUND) to be connected to Terminal 31.
- 6. Power supply must be 12/24VDC, fused from source.
- 7. Failure to insert terminals in correct positions could lead to device failure or damage.
- 8. Power and ground wires to be connected to the correct sources. Brigade accepts no liability for subsequent damage due to incorrect installation.
- 9. Refer to latest revision Brigade Electronics Engineering Drawing BE-003026-XX-14 for further details.

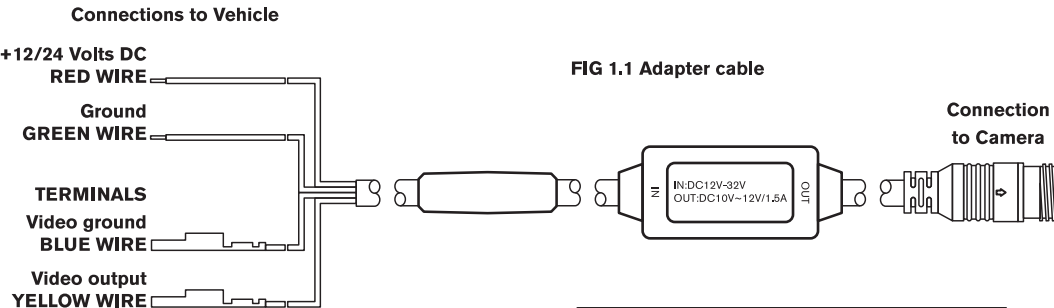


FIG 1.2 Quadlock Connector (Rear of monitor)

PIN	FUNCTION
C2	CVBS1 - Video input 1
C4	CVBS2 - Video input 2
C5	CVBS3 - Video input 3
C8	AGND - Ground CVBS1
C10	AGND - Ground CVBS2
C11	AGND - Ground CVBS3

AC-24-12(007) (4762)

Iveconnect Adapter Cable



FITTING NOTES

- 1. This adapter cable is for vehicles with suitable Iveconnect controllers only. Refer to manufacturers guidelines for other models.
- 2. CVBS1 video input used for reverse camera. Configure menu option "Camera Activated by Reverse" as required.
- 3. CVBS2 & CVBS3 video inputs can be not triggered. Views only available through menu selection.
- 4. Terminals to be inserted in appropriate plug housing position. Terminals must 'click' in place.
- 5. Green wire (GROUND) to be connected to Terminal 31.
- 6. Power supply must be 12/24VDC, fused from source.
- 7. Failure to insert terminals in correct positions could lead to device failure or damage.
- 8. Power and ground wires to be connected to the correct sources. Brigade accepts no liability for subsequent damage due to incorrect installation.
- 9. Refer to latest revision Brigade Electronics Engineering Drawing BE-003026-XX-14 for further details.

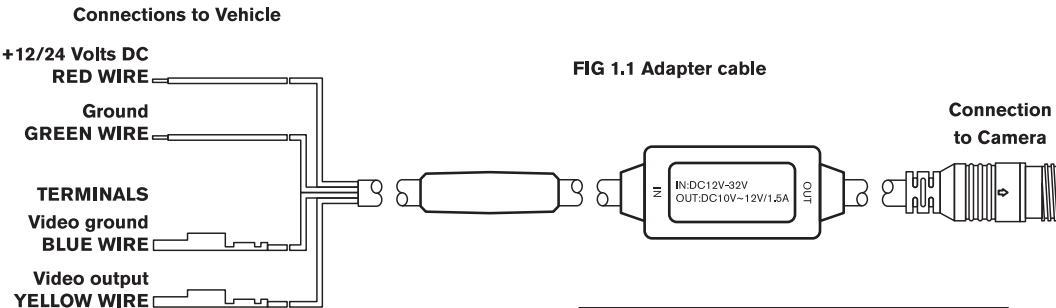


FIG 1.2 Quadlock Connector (Rear of monitor)

PIN	FUNCTION
C2	CVBS1 - Video input 1
C4	CVBS2 - Video input 2
C5	CVBS3 - Video input 3
C8	AGND - Ground CVBS1
C10	AGND - Ground CVBS2
C11	AGND - Ground CVBS3