


Product Specification

Brigade Model Number: BE-822C

Brigade Stock Code: F2151

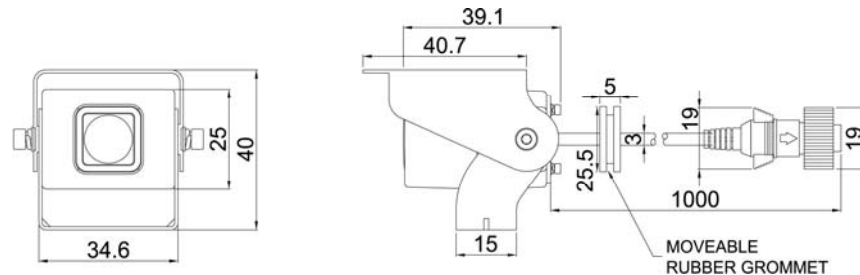

Dimensions: mm

Product Specification

Environmental Specifications:

- Shock Rating: 100 G
- Vibration Rating: 10 G
- Camera IP Rating: IP68
- Connector IP Rating: IP67
- Operating Temperature: -20° to +70°C
- Storage Temperature: -30° to +80°C

Testing Standards:

- CE
- RoHS
- WEEE
- 2006/28/EC
- 2003/97/EC with compliant monitor.
- R46 with compliant monitor.
- 95/54/EC
- ECE R10.02
- HALT
- ISO 230653: 2006 (IP Testing)

Technical Specifications:

- Operating Voltage: 12 Vdc
- Current Consumption: ≤100mA
- Power Consumption: ≤1.5 Watts
- Imaging Devices: CCD - 1/4" PANASONIC
DSP - SHARP
- TV System: PAL
- Picture Elements: 512 (H) x 582 (V)
- Visual Resolution: 380 TV Lines
- Lens Focal Length: 1.9mm
- Signal to Noise Ratio: >47dB
- Required Illumination: 1.0 Lux @ 3 Meters
- Video Output: 1.0 Vp-p / 75Ω

Technical Specifications Continued...

- Viewing Angle: 120° (H), 90° (V), 150° (D)
- Weight: 50 Grams
- Length of Cable: 1 Meter
- Overall Dimensions: 47.2mm (W) x 50.7mm (D) x 40mm (H)
- Casing Material: Die Cast Aluminium
- View: Normal
- Finish: Black Spray Paint

Features:

- Back Light Compensation
- Automatic White Balance
- Automatic IRIS
- Wide Viewing Angle
- BE Type Connector
- High Quality PANASONIC CCD
- High Quality SHARP DSP

Package Contents:

- 1x Camera
- 1x Instruction Leaflet
- 1x Bracket
- 1x Sunshield
- 2x Screws
- 1x 3mm Allen Key
- 3x 5mm Locking Nuts
- 3x 5mm Bolts
- 3x Self Tapping Screws
- 1x 30cm Self Vulcanizing Insulation Tape