


Revision Notes.

R1 - ENTIRE DRAWINGS REVIEWED AND UPDATED WITH TOLERANCES.


APA: -	Drawn:-	Checked: JNEWMAN	Approved: DKERAL	Date: 02/06/11
R2 - NOTES UPDATED.				
APA: -	Drawn:-	Checked: JNEWMAN	Approved: DKERAL	Date: 03/11/11
R3 - TOLERANCES ON CONNECTOR A REMOVED, VIEW A PIN DETAILS UPDATED.				
APA: DLIN	Drawn: RABATES	Checked: A.FEDRIGHI	Approved: GPUTTI	Date: 09/01/14

VIEW A

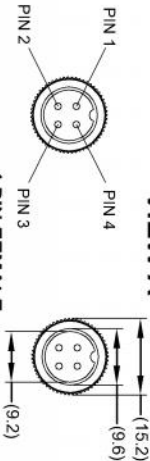

4 PIN FEMALE
MATING FACE


VIEW B



4 MINI DIN FEMALE
MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	NOT USED	NO CONNECTION
3	WHITE	AUDIO
4	RED	+12V
5	BLACK	GND

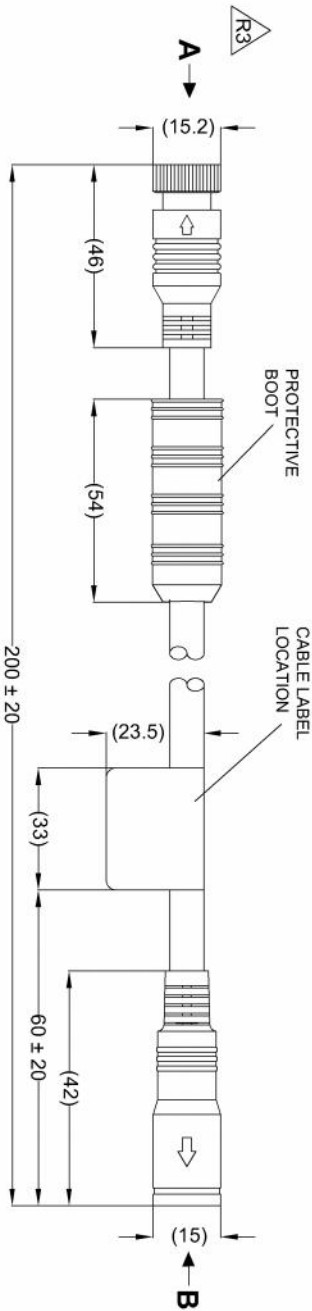

NOTES:

1. ENSURE ARROWS LINE UP WITH LOCATING LUG ON CONNECTOR.
2. CABLE MUST BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS
3. PROTECTIVE BOOT SHOULD BE WITHIN 100MM OF CONNECTOR A.
4. ENSURE PROTECTIVE BOOT IS USED IN INSTALLATION.
5. CABLE COLOURS ARE SUBJECT TO CHANGE.
6. FOR CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-001500-XX-11.
7. COLOUR OF CONNECTORS: BLACK.
8. FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING #SV50-2 REVISION 1.1.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com



Third Angle

Assembly PI Approval SV - 02/06/11		Approved by DKERAL		Checked by JNEWMAN		Drawn by MBUTLER	
Units	mm	Scale	N/A	Released	24/04/08	Assembly Ref	SV50-2
Status	RELEASED						
Part No	BE-000539-03-08						