Revision Notes:				
R1 - PINOUT TABLES UPDATED, CABLE BUILDUP UPDATED AS PER ECR CR-A289.				
APA: S.ATTWOOD	Drawn: R.BATES	Checked: B.CHILDS	Approved: G.PLITH	Date: 24/07/14

VIEW A

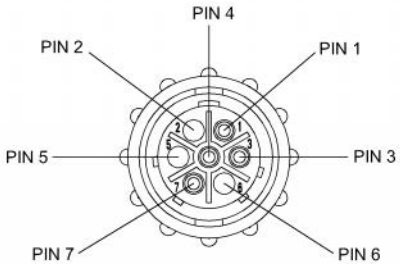

7 PIN AMP FEMALE MATING FACE

R1

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	NOT USED	NOT USED
3	SHIELD	GND
4	YELLOW	VIDEO
5	NOT USED	NOT USED
6	NOT USED	NOT USED
7	SHIELD	GND

VIEW B

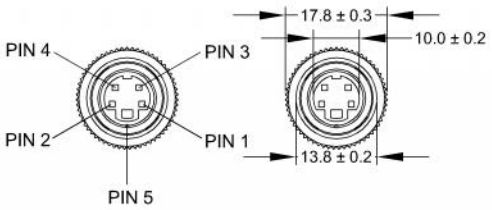

4 PIN MINI DIN FEMALE MATING FACE

R1

PIN #	WIRE COLOUR	DESCRIPTION
1	YELLOW	VIDEO
2	RED	+12V
3	BLUE	ADD. FUNCTION
4	NOT USED	NOT USED
5	SHIELD	GND

VIEW A-A

CABLE BUILDUP

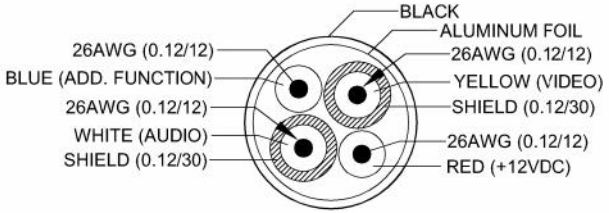

CHANGES FROM BASE PRODUCT BE-X003 (0805) TO AC-041 (4245)

CHANGE:
1. CUT CABLE TO REQUIRED LENGTH.
2. REPLACE 4 PIN MALE CONNECTOR WITH 7 PIN FEMALE AMP CONNECTOR.
3. REPLACE BE-X003 (0805) CBL-LBL WITH AC-041 (4245) CBL-LBL..
4. REPLACE BE-X003 (0805) GB-LBL WITH AC-041 (4245) GB-LBL

OPERATION:
NO AUDIO
NO SHUTTER/TILT

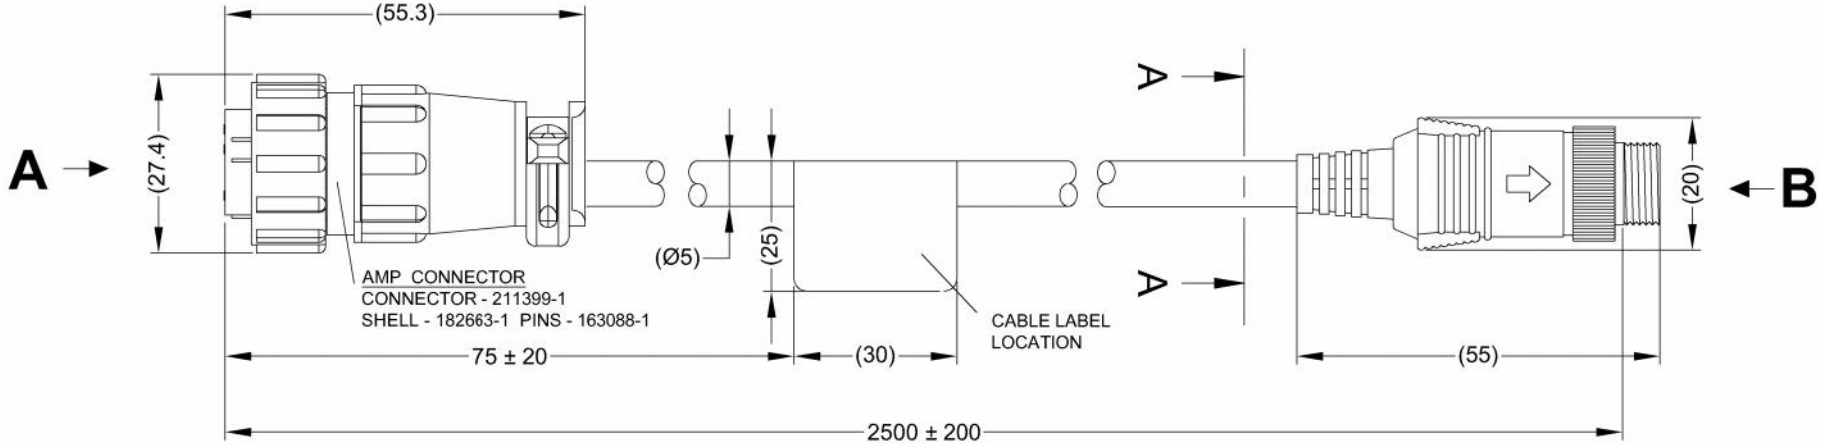

NOTES:
1. FOR CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-002446-XX-13.
2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002445-XX-13.
3. INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
4. FOR CONNECTOR "A" DETAIL REFER TO CONNECTOR MANUFACTURER DRAWINGS.
5. BLUE & WHITE CORES TO BE ISOLATED.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com

Assembly Pl Approval J.FULLER - 12/06/13	Approved by G.PLITH	Checked by B.CHILDS	Drawn by M.POTTER
Angle of Projection	Units mm	Scale N/A	Released 13/06/13	Assembly Ref -
Third Angle	Status RELEASED	AC-041	
	Part No 4245	BE-002199-01-12	

FrameV3