

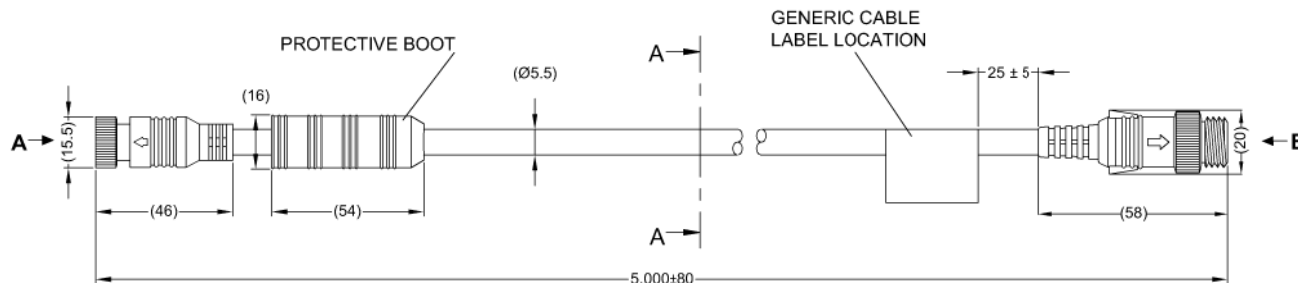
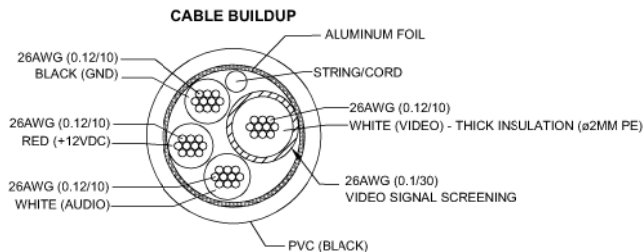


Revision Notes.				
R1 -				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -

VIEW A-A

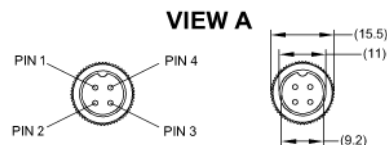


CABLE BINDING SPECIFICATION

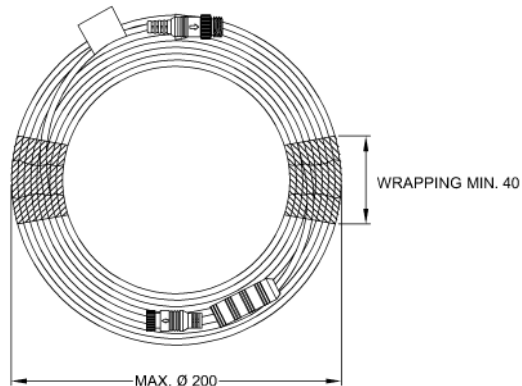

4 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	THICK WHITE (ø2MM PE)	VIDEO

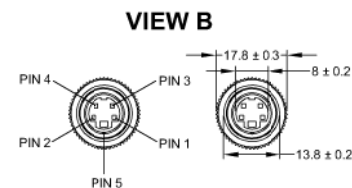

4 PIN MINI DIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	THICK WHITE (ø2MM PE)	VIDEO
2	RED	+12V
3	N/A	N/C
4	WHITE	AUDIO
CASE	BLACK/SHIELD	GND


NOTES:

1. PROTECTIVE BOOT SHOULD BE WITHIN 200MM OF CONNECTOR A.
2. FOR PACKAGING AND LABELING DETAIL REFER TO LATEST REVISION OF THE MASTER BOM.
3. ENSURE PROTECTIVE BOOT IS USED IN INSTALLATION.
4. CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
5. RESISTANCE <1Ω OVER FULL 5M LENGTH.
6. PRODUCT DESCRIPTION: CMS ADAPTER CABLE, ELITE HD CAMERA TO SELECT HD CABLE - 5M.
7. LETTER "H" TO BE PRINTED ONTO OUTER PVC SHEATH ALONG ENTIRE CABLE LENGTH.

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE®
www.brigade-electronics.com

Assembly PI Approval W.WU (18/12/2019)		Approved by B.JOHN		Checked by L.PILLAY		Drawn by J.STEWART	
Angle of Projection  Third Angle		Units mm	Scale N/A	Released 18/12/19	Assembly Ref -		
Status RELEASED				AC-H014(5M) CABLE			
Part No 5635				BE-003895-00-18			