
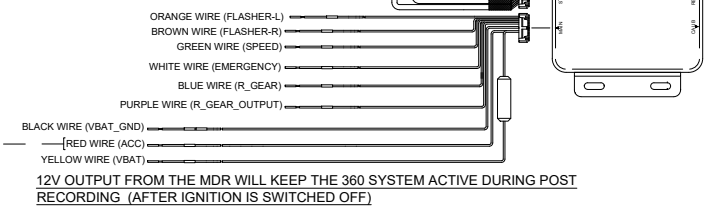


ITEM	MODEL / DESCRIPTION
①	BN360-300 / BACKKEY AHD 360 SELECT
②	VBV-770HM / MONITOR KIT
③	MDR-644XX-X-XXX / MDR-600 4G (OPTIONAL) & WIFI (OPTIONAL), 4 ANALOGUE CHANNELS, 4 IP CHANNEL, 500GB / 1TB / 2TB CMR / SSD KIT
④	BN360-HXXX / CAMERA CABLE
⑤	AC-H305 / ADAPTOR CABLE

Revision Notes.				
R1				
APA: -	Drawn:-	Checked:-	Approved:-	Date: -

FOR RECORDING AFTER IGNITION IS SWITCHED OFF, THE MDR WILL NEED TO BE CONFIGURED FOR THIS OPERATION. PLEASE REFER TO THE MDR-600-IG INSTALLATION GUIDE FOR DETAILS.

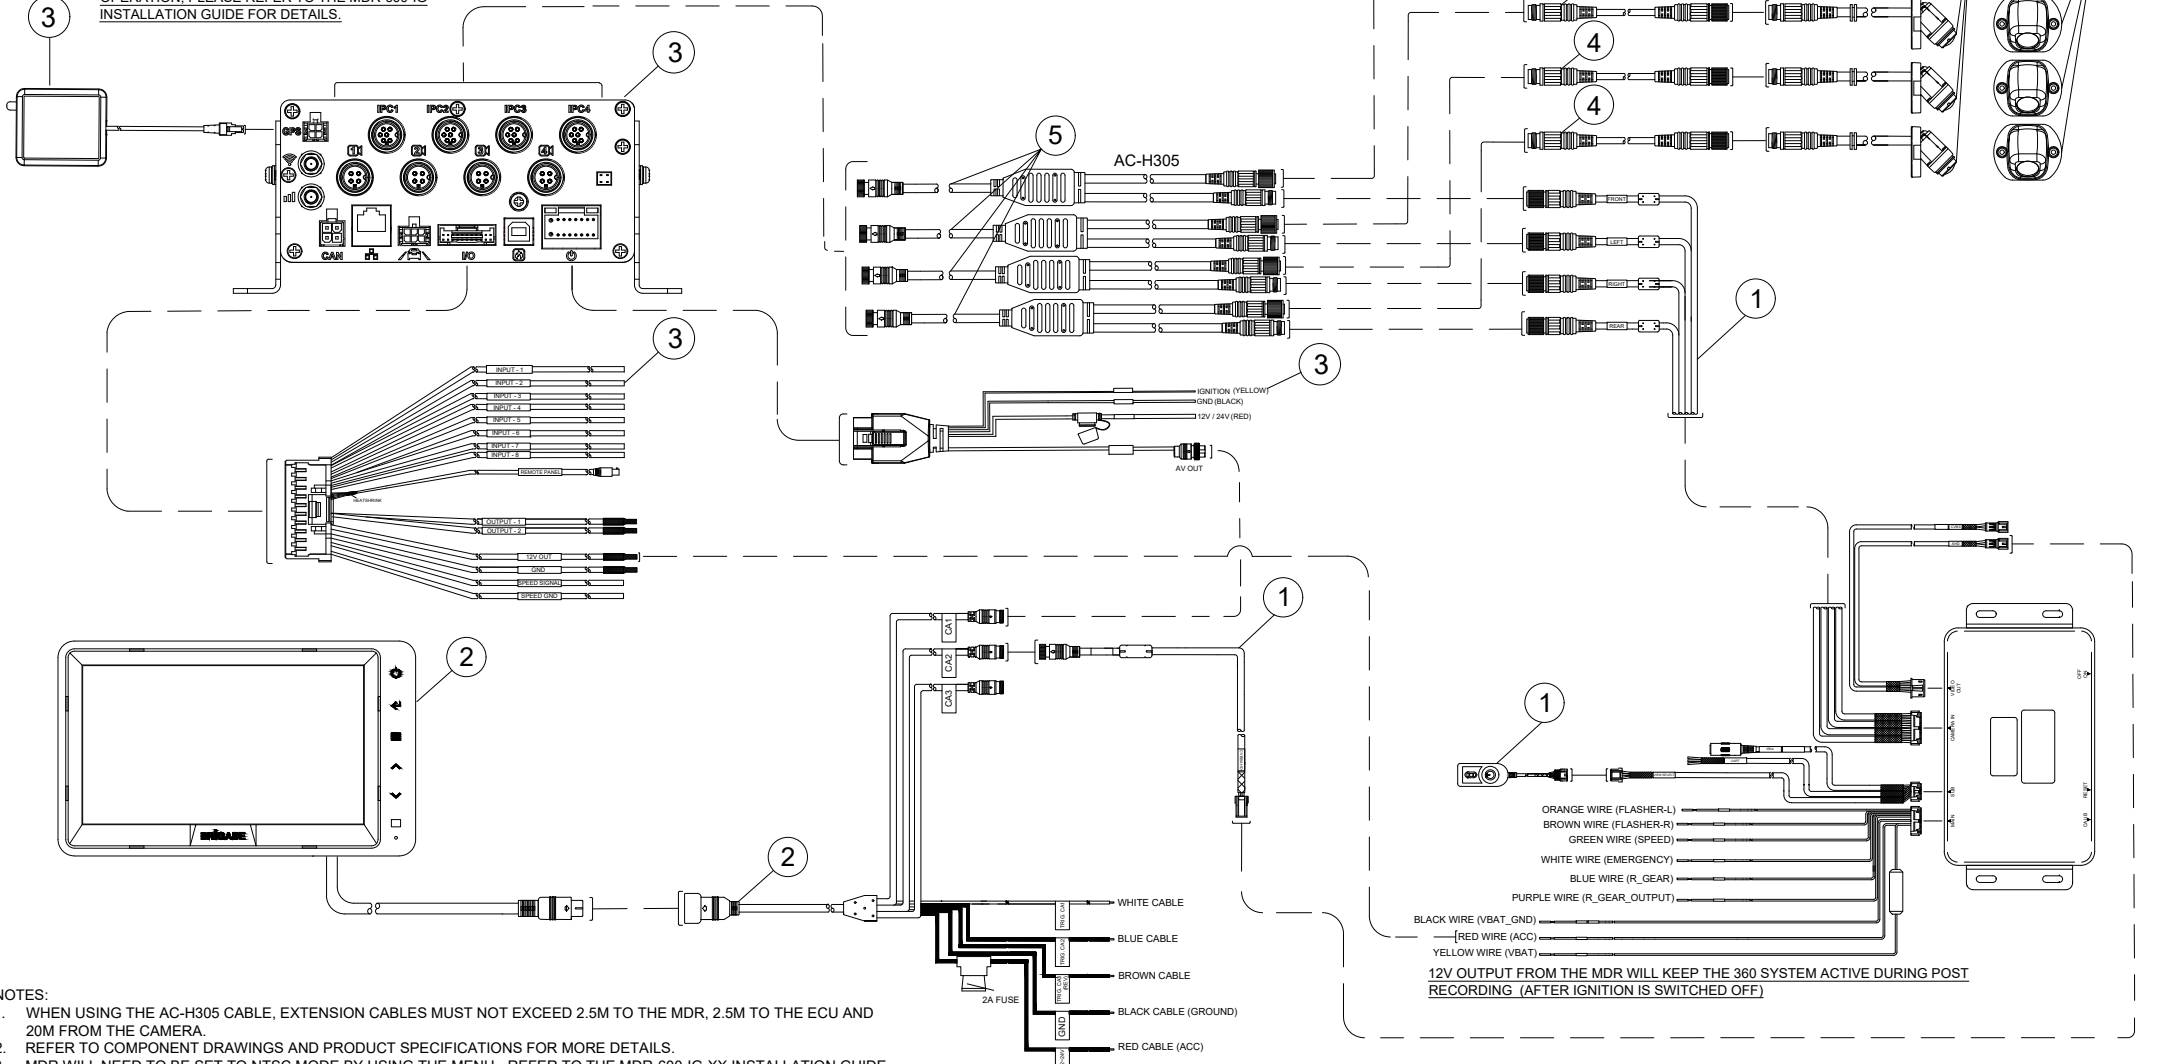

- NOTES:
1. WHEN USING THE AC-H305 CABLE, EXTENSION CABLES MUST NOT EXCEED 2.5M TO THE MDR, 2.5M TO THE ECU AND 20M FROM THE CAMERA.
  2. REFER TO COMPONENT DRAWINGS AND PRODUCT SPECIFICATIONS FOR MORE DETAILS.
  3. MDR WILL NEED TO BE SET TO NTSC MODE BY USING THE MENU - REFER TO THE MDR-600-IG-XX INSTALLATION GUIDE AND BN360-300 INSTALLATION GUIDE FOR INSTALLATION, CALIBRATION & CONFIGURATION OF THE SYSTEM.
  4. BN360-LXXX CABLE LENGTH WILL BE DEPENDANT ON APPLICATION.
  5. VBV-H4XX HD EXTENSION CABLE REQUIRED TO CONNECT TO MONITOR DEPENDING ON APPLICATION.
  6. TRIGGER CONNECTIONS DEPENDENT ON APPLICATION.
  7. REFER TO THE MDR-600-IG-XX INSTALLATION GUIDE FOR DETAILS OF ADDITIONAL CONNECTION.

**PROPRIETARY NOTICE**  
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval N/A	Approved by A. KEBEDE	Checked by S. GOVENDER	Drawn by S. ZHANG
Angle of Projection 	Units mm	Scale N/A	Released 20/02/23
	Status RELEASED	SELECT AHD 360 WITH MDR-644	
	Part No N/A	BE-004776-00-23	