

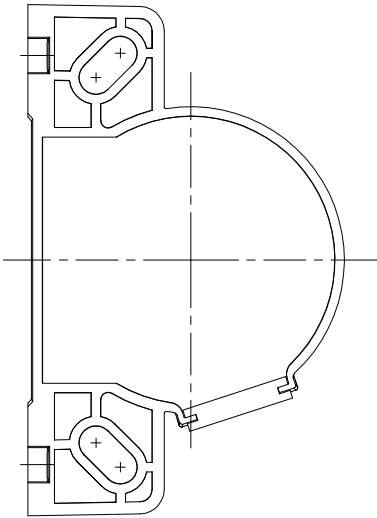

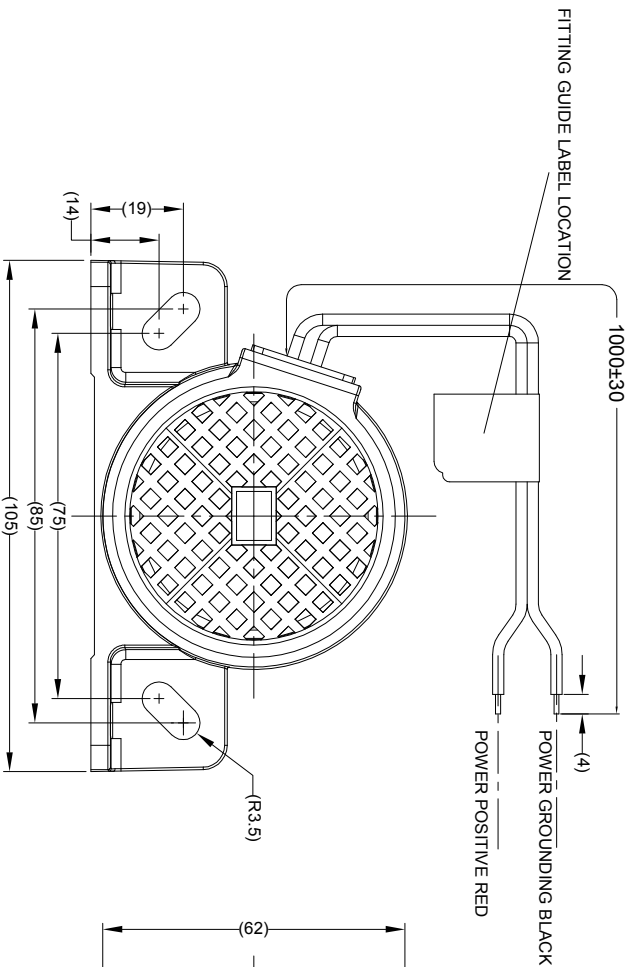


Revision Notes			
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS. STANDARDS UPDATED AS PER ECR CR-A274.			
APRIL KIDA	DRAWNBATES	CHECKEDMBUTLER	APPROVEDGPUTIH
			DATE 28/08/14

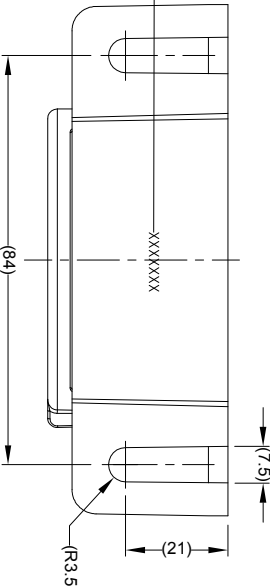

SPECIFICATION:

- 1. RATED VOLTAGE: 12 AND 24 VOLT DIRECT CURRENT (WORKING VOLTAGE RANGE 9~32 VOLTS)
- 2. RATED CURRENT: 0.2 AMPERES OR LESS.
- 3. SOUND PRESSURE: 92±4 DECIBELS AT TEST VOLTAGE OF 14 AND 28 VOLTS (AS MEASURED AT DISTANCE OF 1.2M AND AT HEIGHT OF 1.2M ABOVE THE GROUND)
- 4. INTERMITTENCE: 80±10 CYCLES PER MINUTE AT TEST VOLTAGE OF 14 AND 28 VOLTS.
- 5. TONE: WHITE SOUND(BBS).
- 6. ENVIRONMENTAL: SUBJECT TO SAE J994.



E= EUROPE
U= USA
A= AUSTRALIA

- NOTES:
- 1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
 - 2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
 - 3. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN REVISION NOTES.



PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly PI Approval K.IIDA - 26/02/13				Approved by S.MATTHEWS		Checked by G.PUTIH		Drawn by R.BATES	
Angle of Projection		Units mm	Scale N/A	Released 27/02/13		Assembly Ref BBS-92			
		Status RELEASED							
Third Angle		Part No 09348		BE-002320-01-13					