Revision Notes.		
Checked By: -	Approved By: -	Date Released: -

VIEW A



PIN #	WIRE COLOUR	DESCRIPTION
1	RED	12-24VDC
2	BLACK	GROUND

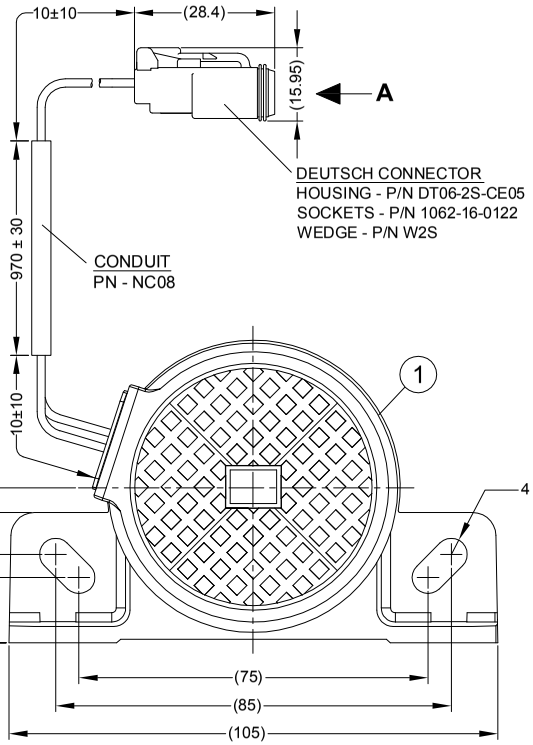

ITEM	STOCK CODE	QTY	DESCRIPTION
1	(# TBD)	1	BBS-92 (DC) ALARM ONLY
2	(# TBD)	1	ALARM WARNING STICKER (NOT SHOWN)
3	(# TBD)	1	FITTING INSTRUCTIONS (NOT SHOWN)

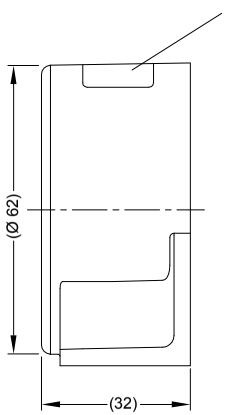

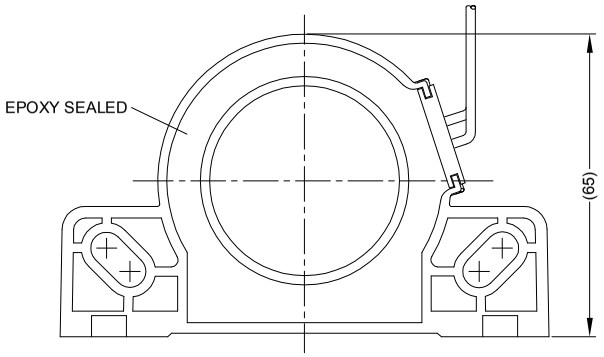

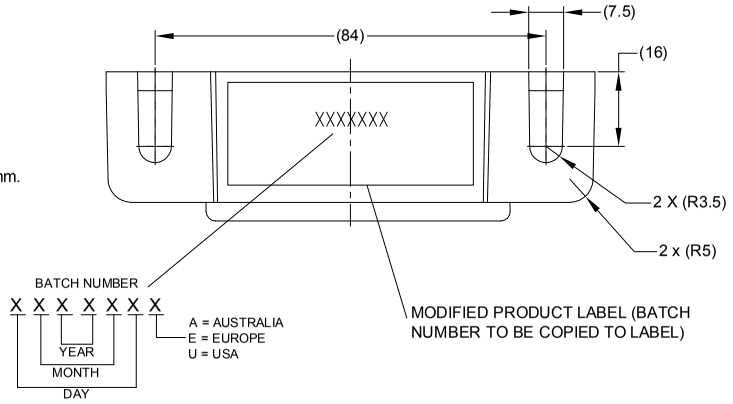

CHANGES FROM BASE PRODUCT BBS-92 (#0934A) TO BBS-92 (DC) (#3003A)

CHANGE:
1. 970mm OF NC08 POLYAMIDE (NYLON) PA6 NON SPLIT CONDUIT ADDED TO CABLE.
2. DEUTSCH CONNECTOR ADDED.
3. REMOVE FITTING GUIDE LABEL (LOCATED ON THE END OF POWER WIRES).
4. MODIFIED PRODUCT LABEL ADDED REF LATEST REVISION OF DRW BE-001956-XX-12 & TEMPLATE BE-001958-XX-12.
5. ALL COMPONENTS REMOVED FROM ORIGINAL GIFT BOX (4109) AND FITTED INTO REPLACEMENT GIFT BOX STOCK CODE (4103) 170 X 168 X 70mm.
6. REPLACEMENT GIFT BOX LABEL ADDED TO NEW GIFT BOX REF LATEST REVISION OF DRW BE-001957-XX-12 & TEMPLATE BE-001959-XX-12.

OPERATION: SAME AS BASE PRODUCT

SPECIFICATION:
RATED VOLTAGE: 12-24VDC (WORKING VOLTAGE 9-32VDC).
RATED CURRENT: 0.2A OR LESS.
SOUND PRESSURE: 92±4DECIBELS AT TEST VOLTAGE OF 14 AND 28 VOLTS.
INTERMITTENCE: 80±10 CYCLES PER MINUTE AT TEST VOLTAGES 14 AND 28 VOLTS.
OPERATING TEMPERATURE: -40° TO +85°.
TONE: WHITE SOUND (bbs)
ENVIRONMENTAL TEST: SUBJECT TO SAE J994.
FINISH: MATT BLACK.
MATERIAL: ABS PLASTIC.
WEIGHT: 220±20grams

NOTES:
1. REFER TO BASE PRODUCT FOR PRODUCT SPECIFICATION.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

Assembly Pl Approval N.METHA 13/03/12	Approved by S.MATTHEWS	Checked by J.NEWMAN	Drawn by B.CHILDS
Customer Approval KOMATSU MR SCHMELLING 13/03/12	Angle of Projection	Units mm / Scale N/A / Released 14/03/12 / Assembly Ref BBS-92 (DC)	
BRIGADE® www.brigade-electronics.com	Third Angle	Status Released	BBS-92 (DC)
		Stock Code #3003A	BE-001955-00-12