


CHASSIS MOUNTED CAB MOUNTED

DASH MOUNTED MOMENTARY SWITCH
(SUPPLIED WITH TCO-47(01))

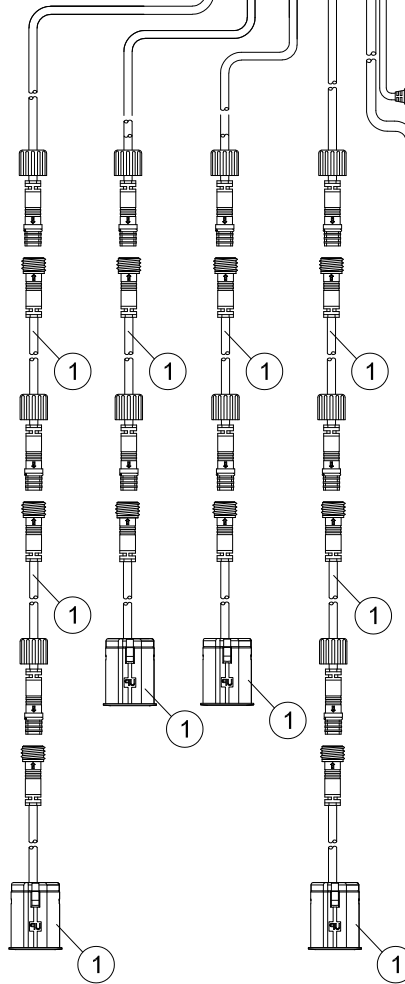

ITEM	PART NO.	QTY	DESCRIPTION
(1)	(5257)	1	SS-4100W SIDESCAN KIT
(2)	(1362A)	1	TS-001 TURN SIGNAL ECU (RECOMMENDED)
(3)	(4851)	1	LS-60A SPEED SWITCH (RECOMMENDED)
(4)	(1334)	1	SS-BC-08 SIDE TURN BACKCHAT (OPTIONAL)
(5)	(4752)	1	TCO-47(01) CUT OFF RELAY
(6)	N/A	-	CONNECTING WIRE (NOT SUPPLIED)

TS-001 APPLICATION TABLE

	WHITE WIRE	BLUE WIRE
RIGHT HAND DRIVE	RIGHT HAND INDICATOR	LEFT HAND INDICATOR
LEFT HAND DRIVE	LEFT HAND INDICATOR	RIGHT HAND INDICATOR



SPEED SWITCH CONNECTOR

12/24 Vdc	OUT	PRG	SPEED
X	X	X	X
X	X	GND	X

TACHO CONNECTION TABLE


REFERENCE GROUND	SPEED SIGNAL
PIN A6	PIN B8

WIRE	CONNECTION
BLACK	POWER SUPPLY NEGATIVE (0V)
RED	POWER SUPPLY POSITIVE +12/24VDC
GREEN	SPEED PULSE INPUT
PINK	CONTROL OF PROGRAMMING & READING MODES
PURPLE	SWITCH POWER OUTPUT (MAX. LOAD 1.2A)



TCO-47(01) CONNECTIONS

WIRE	CONNECTION
BLACK	POWER SUPPLY NEGATIVE (0V)
RED	IGNITION SUPPLY POSITIVE +12/24VDC
BLUE	TRIGGER + (FROM DASH SWITCH)
WHITE	INPUT/OUTPUT
YELLOW	INPUT/OUTPUT

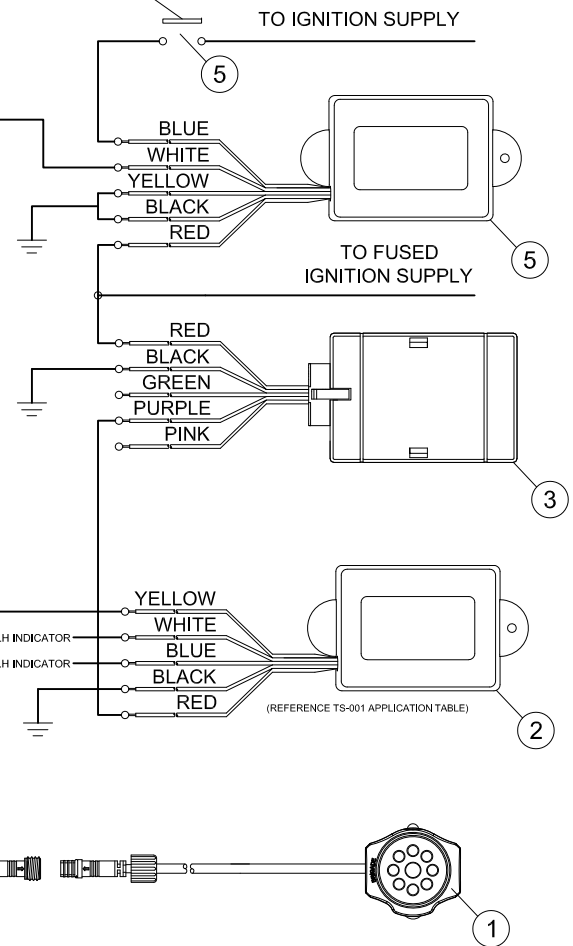

- NOTES:
1. REFER TO COMPONENT DRAWINGS FOR COMPONENT DETAIL.
2. PIN B8 FOR TACHO MAY REQUIRE A TERMINAL INSERTING AS CAVITY MAY BE EMPTY.
3. SS-BC-08 MUST BE MOUNTED FACING THE DANGER AREA.
4. YELLOW AND WHITE WIRES ARE LINKED UNTIL THE CUT OUT IS ACTIVE. RECONNECTION OCCURS ON SECOND BLUE WIRE TRIGGER OR IGNITION CYCLE OFF/ON.

PROPRIETARY NOTICE
THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.



Assembly Pl Approval N/A	Approved by B.CHILDS	Checked by R.BATES	Drawn by M.POTTER
Angle of Projection	Units mm	Scale N/A	Released 16.09.15
Third Angle	Status RELEASED	GENERIC RIGID SS & TCO-47(01)	
	Part No N/A	BE-003228-01-15	